## Vortex Pro Utility Range

Grant's Vortex Pro Utility boilers are incredibly efficient, achieving efficiencies of up to 93.3%. Designed for the kitchen or a utility room, the Pro Utility models deliver choice and performance across the range. Compact in size these models can be an ideal solution for direct boiler replacements of older oil-fired models.

#### Models

VTX15/26 Vortex Pro Utility 15-26kW VTX26/46 Vortex Pro Utility 26-46kW VTX46/70 Vortex Pro Utility 46-70kW

- 15kW 70kW outputs available
- Factory fitted condensate trap within the boiler case (can be positioned externally if preferred)
- Exceptionally quiet in operation

# Vortex Pro System Utility Range

Two sealed system boiler models are available in the Pro Utility System range which include the supply of a factory fitted expansion vessel, filling loop, pressure gauge, automatic air vent, pressure relief valve and high efficiency circulating pump. As with all Grant boilers, these models are straightforward to install and maintain.

#### Models


VTXS15/26 Vortex Pro Utility System 15-26kW VTXS26/46 Vortex Pro Utility System 26-46kW

- 15kW 46kW outputs available
- System pressure gauge display in control panel



\*When installed by a G1 Installer. Subject to full T&C's.

Model shown: VTX15/26

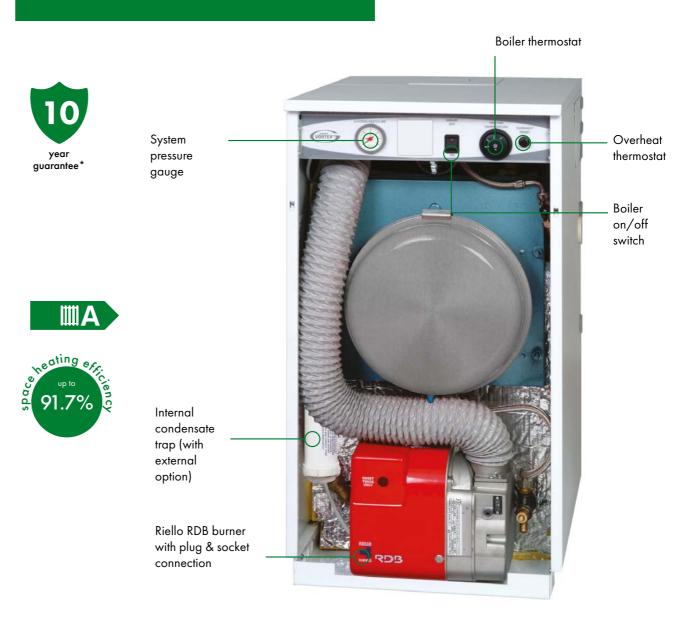


\*When installed by a G1 Installer. Subject to full T&C's.

Model shown: VTXS 15/26


### Vortex Pro Range Technical Specifications


	Output	Output	Set Output	Flow Connection	Return Connection	Cold Water In	Pressure Relief	Weight (dry)
Model	kW	Btu/h	kW	mm	mm	mm	mm	kg
VTX15/26	15 - 26	50 - 90,000	21	22	22	n/a	n/a	130
VTX26/46	26 - 46	90 - 157,000	41	28	28	n/a	n/a	144
VTX46/70	46 - 70	157 - 240,000	64	11/4" BSP	1¼" BSP	n/a	n/a	282
VTXS15/26	15 - 26	50 - 90,000	21	22	22	15	15	138
VTXS26/46	26 - 46	90 - 157,000	41	28	28	15	15	168


### Dimensions (mm)

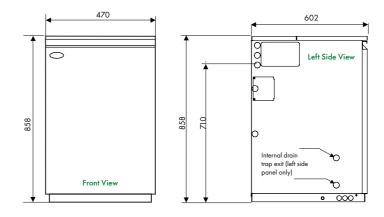

Vortex Pro and Pro System 15-26kW







Vortex Pro and Pro System 26-46kW

Vortex Pro 46-70kW