# Vortex Eco External Range

When space is at a premium indoors, an external boiler can provide the solution. Grant's Vortex Eco External boilers are competitively priced, highly efficient and with their durable powder coated casing, are designed and built to be sited outside of a property. All the Vortex Eco External models have multi-directional flueing options providing flexibility when it comes to installation.

#### Models

VTXOMECO15/21 Vortex Eco External 15-21kW VTXOMECO21/26 Vortex Eco External 21-26kW VTXOMECO26/35 Vortex Eco External 26-35kW

• 15kW – 35kW outputs available

Boiler on/off switch

- High quality external powder coated pain finish
- Built-in boiler frost protection, mains isolating switch and test switch

### Boiler Test switch thermostat Control panel Overheat thermostat Optional Frost stat side or (factory fitted inside rear flue control panel - not exits shown) Condensate trap (factory fitted in rear of casing - not shown) Optional pipe entry points Riello RDB burner with plug & socket connection

Model shown: VTXECO 15/21

\*When installed by a G1 Installer.

Subject to full T&C's.


# Vortex Eco External System Range

The Vortex Eco External System boiler range consists of three models which are also supplied with a high quality external powder coated paint finish. Similar to the Eco Utility System range, all of the Eco External System boilers include a factory fitted expansion vessel, filling loop, pressure gauge, automatic air vent, pressure relief valve and high efficiency circulating pump.

#### Models

VTXSOMECO15/21 Vortex Eco External System 15-21kW VTXSOMECO21/26 Vortex Eco External System 21-26kW VTXSOMECO26/35 Vortex Eco External System 26-35kW

- 15kW 35kW outputs available
- Multi-directional flue options
- Built-in boiler frost protection, mains isolating switch and test switch

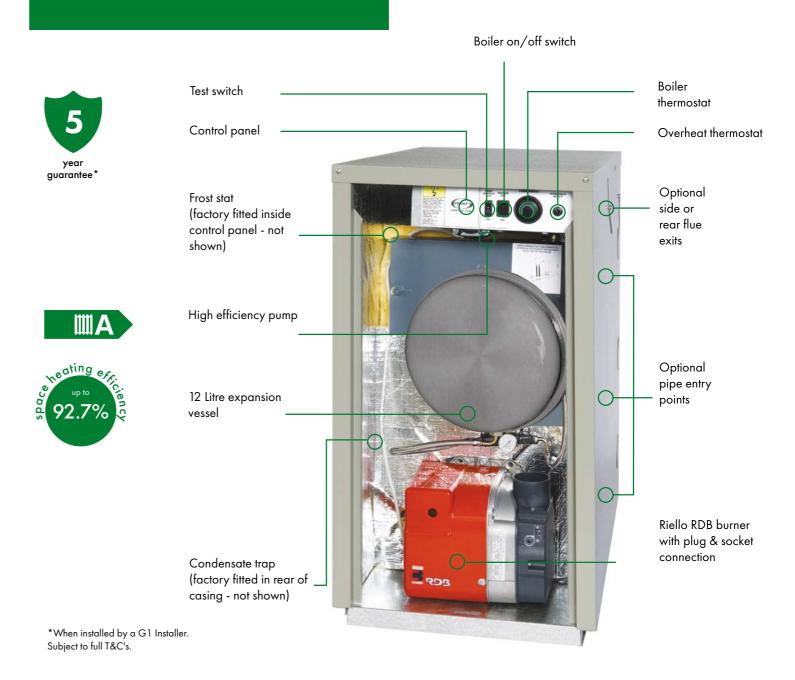


Model shown: VTXSECO 15/21

## Vortex Eco External Range Technical Specifications

	Output	Output	Set Output	Flow Connection	Return Connection	Cold Water In	Pressure Relief	Weight (dry)
Model	kW	Btu/h	kW	mm	mm	mm	mm	kg
VTXOMECO15/21	15 - 21	50 - 70,000	21	22	22	n/a	n/a	113
VTXOMECO21/26	21 - 26	70 - 90,000	23.5	22	22	n/a	n/a	113
VTXOMECO26/35	26 - 35	90 - 120,000	31	22	22	n/a	n/a	142
VTXSOMECO 15/21	15 - 21	50 - 70,000	21	22	22	15	15	136
VTXSOMECO21/26	21 - 26	70 - 90,000	23.5	22	22	15	15	136
VTXSOMECO26/35	26 - 35	90 - 120,000	31	22	22	15	15	152

### Dimensions (mm)

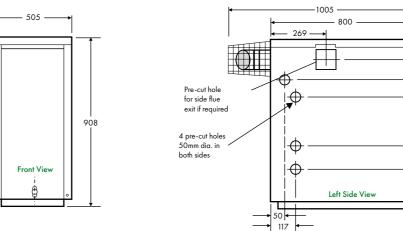

Vortex Eco 15-21, 21-26, 26-35kW External and External System

